





PUSH-ON TYPE NUTS - ROUND PUSH NUTS (Metric Standard)

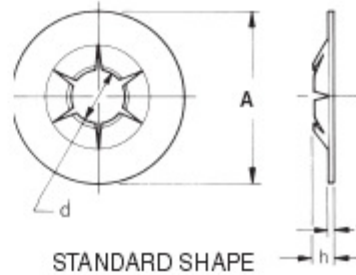

TYPICAL ASSEMBLY



ROUND PUSH NUTS

DIMENSIONS IN MILLEMETERS

D STAUD SIZE		d INSIDE DIAMETER		A DIAMETER	h HEIGHT REF.	t THICKNESS	MIN. PULL OFF FORCE kgt REF.	PART NUMBER
NORMAL	TOL	NORMAL	TOL					
1.2	+0.04 / -0.03	1.1	0 / -0.1	4.5	0.6	0.25	20	PN-1.2
2.0	+0.05 / -0.05	1.9	0 / -0.1	6.0	0.7	0.30	30	PN-2
3.0	+0.05 / -0.05	2.9	0 / -0.15	10.0	1.3	0.30	100	PN-3
4.0	+0.05 / -0.05	3.9	0 / -0.15	12.0	1.4	0.30	100	PN-4
5.0	+0.05 / -0.05	4.9	0 / -0.15	14.0	1.6	0.4	150	PN-5
6.0	+0.05 / -0.05	5.9	0 / -0.15	16.5	1.8	0.4	170	PN-6
8.0	+0.05 / -0.05	7.9	0 / -0.15	17.5	1.8	0.5	200	PN-8
10.0	+0.05 / -0.05	9.9	0 / -0.15	21.0	2.2	0.7	320	PN-10