





U TYPE NUTS (Metric)


TYPICAL ASSEMBLY



STANDARD



DESIGN VARIATIONS

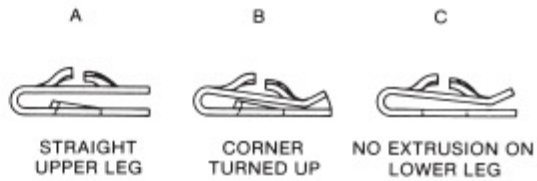

DIMENSIONS IN MILLIMETERS

SCREW SIZE	p PANEL RANGE	DESIGN VALIATION	A LENGTH	B WIDTH	C MAX CTR HOLE TO EDGE	X CTR IMP TO END	H PANEL HOLE DIA	T MATERIAL THICKNESS	PART NUMBER
T4*	0.40-1.00	D	15.0	9.0	7.0	7.5	7.0	0.5	S20185R5
T4*	0.65-1.00	DF	13.2	12.7	5.9	6.6	5.5	0.7	S10031
T4*	0.65-1.60	CD	21.3	11.2	12.7	8.1	4.3	0.7	S10206
T4*	0.79-1.50	DG	15.5	12.0	7.0	7.1	7.1	0.5	T4-U16AP
T4*	1.00- 2.50	CH	16.5	11.0	7.0	8.0	7.0	0.6	S41494
T4*	1.27-2.30	D	15.5	11.2	7.5	7.9	6.4	0.7	S10037
T4*	1.37-2.00	C	16.5	11.0	7.6	8.4	7.0	0.6	S40368SS
T4*	1.80-2.50	DG	15.5	11.0	7.0	7.0	6.0	0.5	S22102
T4*	1.90-2.20	CDG	10.0	11.0	4.5	5.0	6.5	0.6	S42047SUS
T4*	2.00-2.30	CDG	14.0	10.0	7.5	6.0	7.0	0.5	S20492
T4*	2.00-2.70	C	16.5	11.0	7.6	8.4	5.0	0.6	S40022
T4*	2.20-2.80	C	16.4	11.0	7.5	8.5	7.0	0.5	S41358
T5*	0.80-1.50	D	19.5	12.0	11.0	8.0	7.0	0.6	T5-U20AT
T5*	1.00-2.00	WIDE/R	22.0	13.5	10-11.5	6.0	8.5	0.6	S20188R3
T5*	1.50-2.50	D	19.4	13.0	10.0	8.0	8.0	0.7	T5-U20BT
T5*	1.80-2.20	CDG	14.5	11.0	7.5	6.5	7.0	0.7	S21916
T5*	2.00-3.50	CDG	14.0	11.0	7.6	6.0	7.0	0.6	S41897
T5*	2.30-2.55	C	16.0	11.0	7.3	8.0	7.0	0.7	S40471
T5*	2.30-2.80	CH	16.4	11.0	7.3	8.5	7.0	0.6	S21631
T5*	2.70-3.50	WIDE/R	20.0	13.5	7-8.5	10.0	7.0	0.6	S21959
T5*	3.80-4.20	CDG	14.5	16.0	7.0	7.0	7.0	0.7	S22106
T6*	1.50-2.50	D	24.1	15.0	11.0	11.9	9.0	0.8	T6-U25BT

* INDICATES JIS TAPPING SCREW