





TUBULAR TYPE CLIPS


TYPICAL ASSEMBLY

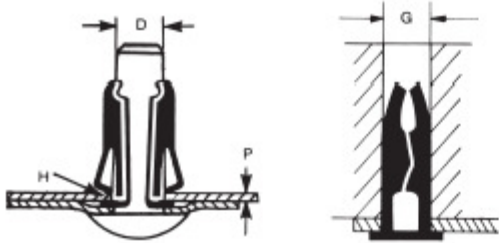

STANDARD



DESIGN VARIATIONS



DIMENSIONS IN INCHES

| SCREW SIZE | P PANEL RANGE | DESIGN VALIATION | A DIA | B HEIGHT | C OPENING AT END | H PENEL HOLE DIAMTER | G HOLE DIAMETER | T MATERIAL THICKNESS | PART NUMBER |
|------------|---------------|------------------|-------|----------|------------------|----------------------|-----------------|----------------------|-------------|
| 0.125 | .030-.036 | STD. | 0.23 | 0.26 | 0.104 | ---- | 0.161 | 0.012 | S10010 |
| 0.125 | .038-.044 | A | 0.23 | 0.26 | 0.107 | ---- | 0.161 | 0.012 | S10012 |
| 0.125 | ---- | C | 0.2 | 0.23 | 0.121 | .161-.164 | ---- | 0.012 | S10055 |
| ---- | ---- | B | 0.21 | 0.44 | 0.094 | .125-.128 | ---- | 0.011 | S10109 |
| .186-.190 | .035-.062 | D | 0.32 | 0.26 | 0.173 | ---- | .228-.234 | 0.017 | S10011 |
| 0.187 | .049-.055 | A | 0.32 | 0.47 | 0.166 | ---- | 0.228 | 0.012 | S10136 |
| 0.189 | .055-.063 | STD. | 0.335 | 0.276 | 0.167 | ---- | 0.24 | 0.012 | S41950 |
| 0.5 | ---- | E | 0.64 | 0.37 | 0.48 | .526-.536 | ---- | 0.012 | S10154 |