




# E RINGS

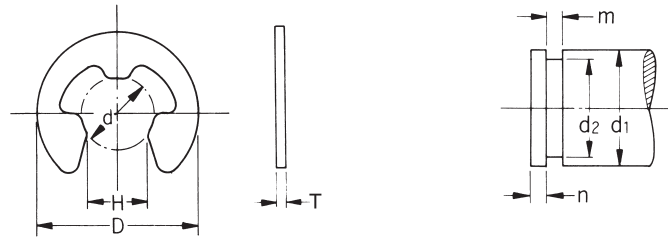

DIMENSIONS IN MILLIMETERS – JAPANESE INDUSTRIAL STANDARD (JIS) B2805

NOM.	E-RING								APPLIED SHAFT (REF.)								PART
	d		D		H		T		b	d1		d2		m		n	
	BASIC	TOL.	BASIC	TOL.	BASIC	TOL.	BASIC	TOL.		BASIC	TOL.	BASIC	TOL.	BASIC	TOL.		
0.8	0.8	0	2	±0.1	0.7	0	0.2	±0.02	0.3	1	1.4	0.8	+0.05	0.3	0	0.4	E-0.8
1.2	1.2	0	3	±0.1	1	0	0.3	±0.03	0.4	0.4	2	1.2	+0.06	0.5	+0.05	0.6	E-1.2
1.5	1.5		4		1.3		-0.25		0.4	0.6	2	2.5				1.5	0.6
2	2	-0.09	5	±0.2	1.7	0	0.4	±0.04	0.7	2.5	3.2	2	0	0.7	0	1	E-2
2.5	2.5	6	2.1		0.4		0.8		3.2	4	2.5	0.8				E-2.5	
3	3	0	7	±0.2	2.6	-0.03	0.6	±0.04	0.9	4	5	3	+0.075	0.7	0	1.2	E-3
4	4		9		3.5		0.6		1.1	5	7	4				1.1	E-4
5	5	-0.12	11	±0.3	4.3	-0.35	0.6	±0.05	1.2	6	8	5	0	+0.1	0	1.5	E-5
6	6	12	5.2		0.8		1.4		7	9	6	1.4				E-6	
7	7	0	14	±0.3	6.1	0	0.8	±0.05	1.6	8	11	7	+0.09	0.9	0	1.8	E-7
8	8		16		6.9		0.8		1.8	9	12	8				1.8	E-8
9	9	-0.15	18	±0.3	7.8	-0.45	0.8	±0.06	2.0	10	14	9	0	1.15	0	2	E-9
10	10	20	8.7		1.0		2.2		11	15	10	2.2				E-10	
12	12	0	23	±0.3	10.4	0	1.0	±0.06	2.4	13	18	12	+0.11	1.65	+0.14	2.5	E-12
15	15	-0.18	29		13.0		1.5		2.8	16	24	1.5				E-15	
19	19	0	37	±0.3	16.5	-0.5	1.5	±0.07	4.0	20	31	19	+0.13	0	0	3.5	E-19
24	24	-0.21	44		20.8		2.0		5.0	25	38	2.0				E-24	